



⑪ Publication number:

prior art references  
cited in the  
national German  
Examination  
Procedure  
**0 179 612**  
**A2**

⑫ EUROPEAN PATENT APPLICATION

② Application number: 85307456.5

⑤ Int. Cl.<sup>4</sup>: H 04 N 7/167

②② Date of filing: 16.10.85

③ Priority: 26.10.84 US 665114

④3 Date of publication of application:  
30.04.86- Bulletin 86/18

⑧ Designated Contracting States:  
BE CH DE FR GB IT LI NL SE

71 Applicant: GENERAL INSTRUMENT CORPORATION  
767 Fifth Avenue  
New York New York 10153(US)

77 Inventor: Horne, Donald  
20 Edgediff Golfway 403  
Don Mills Ontario(CA)

74) Representative: Allam, Peter Clerk et al,  
LLOYD WISE, TREGEAR & CO. Norman House 105-109  
Strand  
London WC2R 0AE(GB)

⑤4 Cryptographic system for direct broadcast satellite network.

57) A three key cryptographic system is used in the transmission of digitized signals to a plurality of receivers, each (Figure 2) having a unique address number and a factory stored signature key which is a function of the address number. At the transmission end, a common key is generated (14) and used to encrypt (16) the signals to be transmitted. The signature key is generated (20, 22) for each receiver unit by encrypting the address number of the unit (18) using a secret master key (20). The common key is then encrypted (16) for use by each receiver using the generated signature key for that receiver. A data stream is inserted into the horizontal blanking intervals of the composite video signal. The data stream includes the encrypted signals receivable by all receivers and addressed portions, each receivable by a different receiver, containing the encrypted common key for that receiver. The receiver decrypts (26) the common key with the stored signature key and uses it to decrypt (24) the signals. Only a single master key must be stored and protected.


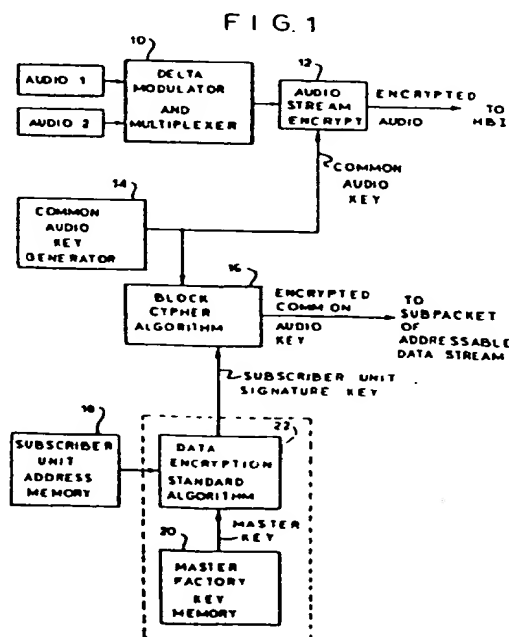


FIG. 2

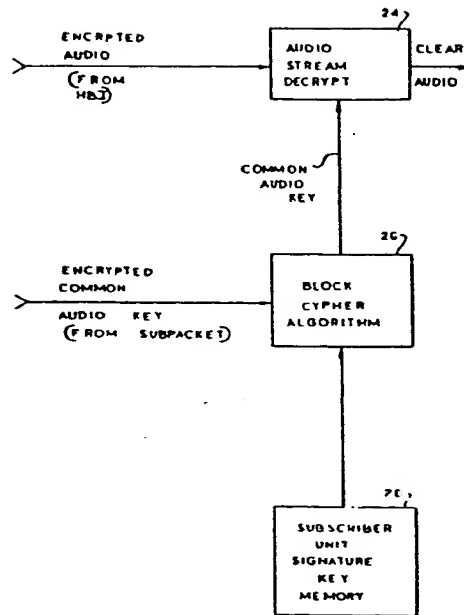

5

10

15

20 CRYPTOGRAPHIC SYSTEM FOR DIRECT  
BROADCAST SATELLITE NETWORK

25 The present invention relates to  
cryptographic systems and, more particularly, to  
a cryptographic system for use in a direct  
broadcast satellite communication network  
to permit the reliable, secure transmission of  
audio and control signals.

30

The availability of small, low-cost television receive-only terminals in recent years has resulted in an increasing demand for direct broadcast satellite services. Such  
5 services include Pay TV, tele-conferencing, tele-seminar, private broadcast networks, and the like. Moreover, as receive only television antenna technology improves and the cost of television receive-only terminals decreases,  
10 the demand for direct broadcast satellite services is expected to increase.

Unlike land lines and terrestrial microwave links, satellite transmissions lack privacy. Such transmissions can be received  
15 by any TV receive-only terminal whose antenna is situated to receive the satellite signals. Accordingly, the secure transmission of video and audio programming and data signals is required to provide the privacy essential to  
20 many applications.

A simple example of a direct broadcast satellite network in which security is required is one which broadcasts television signals to paying subscribers. Since any receiver having  
25 an antenna in the broadcast signal area can receive the satellite signals, it is necessary that the signals be encoded in a way which can be decoded only by subscribers' receivers. Certain subscribers may have paid for certain  
30

programs or program groups, whereas others may have paid for other programs or program groups. The signals must then be further encoded such that subscribers who have paid for particular  
5 programs or groups of programs can receive same, while other subscribers cannot.

In addition, it may be desirable to design the system such that a particular subscriber can preview a program and then  
10 decide whether he/she wishes to watch the program and, hence, pay for the privilege. In such an impulse pay-per-view system, the decision of the subscriber must be recorded and communicated to a billing facility for  
15 appropriate billing. In such instances, the control signals to the subscriber's receiver instructing the receiver how to communicate with the billing office must be secure in order to eliminate the possibilities for theft of the  
20 service.

In the direct broadcast satellite service in which the cryptographic system of the present invention is used, the video signals are processed and transmitted in  
25 analog form. Audio signals are digitized and transmitted in digital data form. Addressable control data is organized into packets according to address and transmitted in the same digital

form as the audio signals. All of the signals are combined in baseband using time-division-multiplex techniques. The combined baseband signal is then transmitted over the satellite link to subscribers' receivers using FM modulation.

In general, the transmission end equipment consists of a program processing unit and a real time controller. The program processing unit performs video signal processing and scrambling, audio digitization, encryption of the audio data, and baseband signals time multiplexing. The real time controller generates the audio cryptographic keys, encrypts the addressable control messages, generates the packet messages in accordance with the transmission protocol, maintains the user data base and communicates with other processing units.

The receiving end equipment includes an addressable controller decoder designed for use with a receiver which has the necessary interface for interaction with the decoder. The addressable controller-decoder demultiplexes the baseband signal, controls the terminal, descrambles the video signal, decrypts the audio data, and converts the audio data into analog form.

The baseband signal utilizes a composite video signal format which includes active video portions and horizontal blanking interval portions. The two audio channels and control data channel occupy a portion of the horizontal blanking intervals. The video frame synchronization information and the zero level reference are transmitted during the vertical blanking interval. The audio data and the control data are transmitted in a burst, synchronous mode. The data is non-returnable to zero binary encoded.

A two-level video scrambling screen is used. The first level is achieved by removing the line and frame synchronization pulses completely from the video signal. A unique sync word is transmitted in the vertical blanking interval for synchronization purposes. The addressable controller-decoder establishes synchronization by searching and locating the sync word. Once the sync word is located, all the sync pulses are reconstructed with reference to the sync word. This technique is used in conjunction with video signal inversion, which is the second security level. The sequence of video inversion is controlled by a binary bit stream at the transmitting end. The same bit stream is used to recover the

inverted signal at the receiving end.

Unlike video scrambling, a highly secure audio encryption system can be achieved relatively inexpensively. The decryption  
5 circuit, being totally digital, can be implemented using semi-custom or custom integrated circuits. It is highly important that the encryption system employed achieve zero transmission error propagation, that is, one bit in error in the  
10 encrypted bit stream results in only one bit in error in the decrypted bit stream.

The system uses an encryption scheme in which the clear audio bit stream is combined with the bit stream generated by a  
15 stream cipher using an exclusive OR operation. The receiving end decrypts the audio bit stream using the same stream cipher bit stream. The stream cipher bit stream is generated by a secret key and an initializing vector. The  
20 algorithm for generating the bit stream is secret. The secret key is used for the duration of the communication session and is transmitted in encrypted form through the control data channel. The initializing vector  
25 is used for the duration of each NTSC frame and is transmitted in the clear form in the horizontal blanking interval. Extremely low



error rate for the initializing vector is achieved by transmitting each bit many times.

5 The addressable control data channel carries a lot of sensitive information such as audio decryption keys and authorization tier levels. The present system is designed to prevent an eavesdropper from receiving the correct information and to prevent a legitimate terminal from receiving more information than 10 is authorized. The encryption system utilized in the present invention uses the concept of different terminal keys. A different key is used for the encrypted transmission to each receiver terminal. In this way, even 15 in the unlikely event that a terminal key is compromised, damage can be stopped quickly by deleting the key.

The addressable control data are organized into blocks of 128 bits and 20 encrypted using a secret block cipher. The length of the terminal key is 64 bits. When compared with the conventional Data Encryption System algorithm, the present block cipher has a larger block and a longer key. Accordingly, 25 brute force attacks on the cipher will take considerably more effort.

There will be described hereinafter an embodiment of the present invention that provides a cryptographic system for the reliable secure transmission of audio and control signals in a direct broadcast satellite network.

5           The embodiment also provides a cryptographic system for use in a direct broadcast satellite network for the transmission of information to a large number of different receivers wherein the necessity for storing and protecting a secret key for each receiver is eliminated.

10           It also provides a cryptographic system for use in a direct broadcast satellite network including a large number of receivers wherein only a single master key need be stored and protected at the transmission end.

15           It still further provides a cryptographic system for use in a direct broadcast satellite network wherein the complexity of the system is contained in the transmission end and the various receivers are relatively simple and can be manufactured inexpensively.

20           Stated more broadly, in accordance with one aspect of the present invention, a cryptographic system for the secure distribution of information from a transmission node to first and second receiver nodes is provided. Each of the receiver nodes has a unique  
25 address number. Means are provided

for generating a common key. Means are provided for encrypting the information to be distributed using the common key. Means are provided for generating a different individual key for  
5 each receiver node. The individual key generating means comprises a master key and means for encrypting the address number for each receiver node using the master key. Means are provided for forming an individualized encrypted common key for each receiver node  
10 by encrypting the common key using the generated individual key for that receiver node. Means are provided for distributing the encrypted information to both receiver nodes and the  
15 individualized encrypted common key for each receiver node to that receiver node.

The address number encrypting means preferably employs the Data Encryption Standard algorithm. The common key encrypting means  
20 preferably employs a block cipher algorithm.

The means for forming individualized encrypted common keys comprises means for selecting each receiver node in sequence and for generating the individual key for the  
25 selected receiver node. Means are provided for generating the individualized encrypted common key for the selected receiver node using the generated individual key for that selected receiver node.

30

The distributing means comprises means for generating a data stream. The data stream includes the encrypted information and addressed portions. Each of the  
5 addressed portions comprises the address number and the individualized encrypted common key for an addressed receiver node.

The information to be communicated comprises a digitized audio signal. This  
10 information is distributed through the use of a composite television signal including video signal portions and horizontal blanking intervals. The data stream is preferably inserted into the horizontal blanking  
15 intervals of the composite television signal.

Each receiver node has a unique individual key stored therein. Each receiver node comprises means for receiving the encrypted information, means for receiving  
20 the individualized encrypted common key for that receiver node, and means for decrypting the received individual encrypted common key using the stored individual key. Means are also provided for decrypting the received  
25 encrypted information using the decrypted common key.

The common key decrypting means preferably employs a block cipher algorithm. The information encrypting means and decrypting means preferably each employ a stream cipher algorithm.

5            Preferably, means are provided at the transmission end for periodically changing the common key. Such changes may take place on a program-to-program basis or at prescribed time intervals.

10           According to another aspect of the present invention, a three key cryptographic system for the secure distribution of information from a transmission node to a plurality of receiver nodes is provided. In  
15           the system, a first key is known only to the transmission node. Each receiver node has a unique address number and a pre-stored second key therein. The transmission node comprises means for generating the second key for a  
20           selected receiver node by encrypting the address number for the selected node with the first key. Means are provided for generating a third key. Means are provided for encrypting the information to be distributed with the third  
25           key. Means are provided for encrypting the third key for use by the selected receiver node with the generated second key. Means are provided for distributing the encrypted

30

information to all of the receiver nodes and means are provided for distributing the encrypted third key for a selected receiver node to the selected receiver node.

5           Each of the receiver nodes comprises means for receiving the encrypted information and means for receiving the third key for that receiver node. Means are provided for  
10       decrypting the received encrypted third key with the stored second key. Means are also provided for decrypting the received encrypted information with the decrypted third key.

15           The second key generating means preferably employs a data encryption standard algorithm. The third key encrypting means preferably employs a block cipher algorithm. The third key decryption means also employs a block cipher algorithm.

20           Preferably, the third key generating means comprises means for periodically changing the third key. The information encryption means and information decrypting means each employ a stream cipher algorithm.

25           The stored second key is unique for each receiver node. The stored receiver key for each receiver node is a function of the address number of that receiver node.

30

In accordance with another aspect of the present invention, a three key cryptographic method for the secure information distribution from a transmission node to a plurality of receiver nodes is provided. A first key is known only to the transmission node. Each receiver node has a unique address number and a pre-stored second key which is a function of its address number. The method comprises the steps of generating the second key for a selected receiver by encrypting the address number for the selected unit with the first key. A third key is generated. The information to be distributed is encrypted by the third key. The third key is then encrypted with the generated second key. The encrypted information is distributed to all of the receiver nodes. The encrypted third key is distributed to the selected receiver node. The distributed encrypted information and the encrypted third key are received at the selected receiver node. The received encrypted information is decrypted using the received encrypted third key and the stored second key for the selected receiver node.

The step of decrypting the received encrypted information preferably comprises the steps of decrypting the encrypted third key using the stored second key for the selected receiver node and decrypting the encrypted information using the encrypted third key.

The step of generating the second key preferably comprises the step of encrypting the address number for the selected receiver node with the first key through the data encryption standard algorithm.

The step of encrypting the third key preferably comprises the step of encrypting the third key with the second key through a block cipher algorithm.

The step of encrypting the information preferably comprises the step of encrypting the information with the third key through a stream cipher algorithm.

The step of decrypting the third key comprises the step of decrypting the third key by the stored second key for the selected receiver node through a block cipher algorithm.

The step of decrypting the information preferably comprises the step of decrypting the information with the decrypted third key through a stream cipher algorithm.



In accordance with another aspect of the present invention, apparatus for encrypting digitized signals in a direct broadcast satellite communications system is provided. The system includes a transmission node and a plurality of receiver nodes. Each receiver node has an address number and a pre-stored signature key which is a function of its address number. The apparatus comprises means for generating a common key and means for encrypting the digitized signals with the common key. Means are provided for generating the signature key for a selected unit. The signature key generating means comprises a master key and means for encrypting the address number of the selected receiver node using the master key. Means are provided for encrypting the common key for use by the selected receiver node using the generated signature key for that receiver node. Means are provided for distributing the encrypted digitized signals and the encrypted common key for the selected receiver node to the selected receiver node by means of a data stream. The data stream comprises a first portion containing the encrypted digitized signals and receivable by all receiver nodes and a second portion comprising a plurality of

addressed portions. Each of the addressed portions  
comprises the encrypted common key for the addressed  
receiver node and is receivable only by the receiver  
node having the address number upon which the encrypted  
5 common key therein is based.

The present invention will be further described  
in relation to a cryptographic system embodying same  
for use in a direct broadcast satellite network, the  
following description being taken together with the  
10 accompanying drawings, wherein like numerals refer to like  
parts, and in which:

Fig. 1 is a schematic representation of the  
encryption system at the transmission end of the network;

Fig. 2 is a schematic representation of the  
15 decryption system at each receiver terminal;

Fig. 3 is a schematic representation of the  
encoding system utilized at the factory in order to  
set the receiver terminal memories for decryption of  
the distributed signal; and

20

25

Fig. 4 is a schematic representation of the composite video signal over which the encrypted signals and key information is transmitted.

5

In general, the cryptographic system to be described is designed for use in a pay television distribution network and employs three keys to provide security against unauthorized program viewing. First, a master factory key is arbitrarily chosen as a system constant. Second, the master factory key is used in conjunction with an individual subscriber unit address to produce a second key, called a subscriber unit signature key, unique to each subscriber.

10  
15

A third key, the common audio decryption key, is arbitrarily chosen to encrypt the audio signal at the transmission end. The third key is distributed to each authorized subscriber through the use of the first and second keys.

20

At the factory, the subscriber unit signature key is pre-loaded into a memory in a specific subscriber receiver unit. To distribute the common audio key, it is encrypted using the subscriber unit signature

25

30

key as the key input of a unique block cipher algorithm. The resulting encrypted common audio key is delivered to the specific subscriber by an addressed packet in an addressable data stream.

At the specific subscriber receiver unit, the received encrypted common audio key is decrypted using the unique block cipher algorithm which employs the factory pre-loaded subscriber unit signature key as the decryption key. The resulting common decryption key is then used to decrypt the audio signal.

The integrity of the three key system depends on the effectiveness of the security measures employed to keep the master factory key safe from independent discovery or unauthorized use. In contrast to this, prior art systems require that a unique key for each subscriber unit be protected at the transmission end. The system now described provides comparable security, but eliminates the necessity for protecting a separate key for each subscriber unit. In the present system, only a single key, the master factory key, need be protected at the transmission end.

Since the direct broadcast satellite network in which the cryptographic system is employed is designed to accommodate 2-3 million different subscriber receiver units, the necessity of previous cryptographic systems for protecting the different key for each subscriber unit is quite burdensome. The three key cryptographic system now proposed eliminates this problem entirely as it requires only a single master factory key be protected.

As seen in Fig. 1, the audio channel inputs AUDIO 1 and AUDIO 2 form the inputs to a delta modulator and multiplexer 10 of conventional design. The digitized output from modulator 10 is encrypted in an audio stream encryption circuit 12. The output of encryption circuit 12 is the encrypted audio signal which forms a portion of a data stream. The data stream illustrated in Fig. 4 is inserted into the horizontal blanking intervals of the composite television signal which is transmitted via satellite from the transmission end to each of the subscriber receiver units.

The digitized audio signal is encrypted using a common audio key generated by a common audio key generation circuit 14. The common audio key generating circuit 14 has capability

for changing the common audio key periodically, either on a program-by-program basis or on a time basis such as hourly, daily, etc.

5       The common audio key is transmitted in encrypted form to each subscriber unit. The encrypted common audio key is individualized for each unit. Each of the individualized encrypted common audio keys, one of which is present for each subscriber receiver unit, is  
10       placed in a different addressed portion of the data stream. These portions of the data stream can be received only by the particular subscriber unit for which the individualized encrypted common audio key is intended.

15       Each individualized encrypted common audio key is generated through the use of a subscriber unit signature key. The subscriber unit signature key is unique to a particular unit. Each individualized encrypted common  
20       audio key is generated by encrypting the common audio key using the unique subscriber unit signature key in a block cipher algorithm circuit 16.

25       Each unique subscriber unit signature key is based on the subscriber unit address number for the subscriber unit to which the portion of the data stream including the

individualized encrypted common audio key is addressed. More specifically, each unique subscriber unit signature key is derived by encrypting the subscriber unit address number, stored in a memory 18, using the master factory key, stored in a master factory key memory 20, in an encryption circuit 22 which employs the Data Encryption Standard algorithm.

As shown in Fig. 2, the transmitted encrypted audio signal is extracted from the data stream in the horizontal blanking intervals of the received composite television signal and forms an input to an audio stream decryption circuit 24. The encrypted audio signal will be decrypted using the common audio key. The common audio key is derived from the individualized encrypted common audio key which is transmitted to the receiver.

The receiver monitors the data stream in the horizontal blanking intervals until it detects the portion thereof with its unique address number. The individualized encrypted common audio key for the particular subscriber unit is then obtained from the addressed portion. The individualized encrypted common

audio key is then decrypted in a block cipher algorithm circuit 26 and used to decrypt the encrypted audio signal, also transmitted in the data stream.

5           The subscriber unit signature key for the particular subscriber unit is utilized as the key for the block cipher algorithm circuit 26. The unique subscriber unit signature key for each subscriber unit is  
10 stored in a memory 28 within the unit. The unique subscriber unit signature key for the particular unit is stored in the unit memory in the factory.

          Fig. 3 schematically depicts the  
15 factory encoding system. At the factory, the subscriber unit address is read from the subscriber unit address memory 18 and stored in the subscriber unit address memory 32 in the subscriber unit. The subscriber unit  
20 address is encrypted in the Data Encryption Standard algorithm circuit 22 using the master factory key from memory 20 and is then stored in the subscriber unit signature key memory 28 in the subscriber unit. Later, when signals  
25 are being transmitted, the master factory key from memory 20 is used in the Data Encryption Standard algorithm circuit 22 to generate the unique subscriber unit signature key for each subscriber unit, as described above.

30



Fig. 4 schematically represents the transmitted composite TV signal which comprises a plurality of active video portions, sync portions, and horizontal blanking portions.

5 The data stream is inserted into consecutive horizontal blanking portions.

10 The data stream includes a run-in code for synchronization, an addressable data stream portion, the encrypted digitized audio signals, an audio code portion indicating whether the audio signals are stereo or bilingual, video inversion code, and spare bits.

15 The addressable data stream includes a header portion, containing information for addressing certain groups of subscribers and certain program related information common to all subscriber units in the addressed group. The addressable data stream also includes a plurality of addressed packets 1...n, each  
20 containing the address number for a different subscriber unit. Each addressed packet also contains the individualized common audio key for the addressed unit.

25 Each subscriber unit captures the encrypted audio information, finds a header with its group number, and then searches for the addressed packet with its address number. When the packet with its address number is

30

located, the unit obtains the individualized common audio key therein and uses it, in conjunction with the unique subscriber unit signature key stored in the unit to decrypt the audio signals.

5 It will now be appreciated that the three key cryptographic system that has been described permits the secure distribution of digitized signals to a large number of subscriber units without the necessity for storing a different key for each subscriber unit. Only a single master factory key must be protected in order to maintain the integrity of the entire system.

10 Moreover, there is nothing stored in any particular subscriber unit which, if obtained, would permit the cryptographic system to be broken. Even interception and analysis of all individualized encrypted common audio keys will not provide information concerning the master factory key. Further, periodically changing the common audio key further increases the security of the system.

25

30

5

10

15 CLAIMS:

20 1. A cryptographic system for  
secure distribution of information from a  
transmission node to first and second  
receiver nodes, each receiver node having a  
unique address number, the system characterized  
25 by:

means (14) for generating a common  
key;

means (12) for encrypting the infor-  
mation to be distributed using said common key;

30 means (20, 22) for generating a

different individual key for each receiver node,  
said individual key generating means comprising  
a master key (20) and means (22) for encrypting  
the address number for each receiver node using  
5 said master key;

means (16) for forming an individualized  
encrypted common key for each receiver node by  
encrypting the common key using the generated  
individual key for that receiver node; and

10 means for distributing said encrypted  
information to all receiver nodes and the  
individualized encrypted common key for each  
receiver node to that receiver node.

15 2. The system of Claim 1, characterized  
in that said address number encrypting means (22)  
comprises the Data Encryption Standard algorithm.

20 3. The system of Claim 1, characterized  
in that said common key encrypting means (16)  
comprises a block cipher algorithm.

25 4. The system of Claim 1, characterized  
in that said means (16) for forming an individual  
encrypted common key for each receiver node  
comprises means for selecting each receiver node  
in sequence, for generating the individual key for  
the selected receiver node and means for generating  
the encrypted common key for the selected receiver  
30 node using the generated individual key for the

selected receiver node.

5           5. The system of Claim 1, characterized  
in that said distributing means comprises means  
for generating a data stream, said data stream  
comprising said encrypted information and addressed  
portions, each of said addressed portions  
comprising the address number and individualized  
encrypted common key for an addressed receiver  
10 node.

15           6. The system of Claim 5, characterized  
in that said information to be communicated  
comprises a digitized signal and is distributed by  
a composite television signal including video  
signal portions and horizontal blanking intervals  
and further characterized in that said data stream  
is inserted into said horizontal blanking intervals.

20           7. The system of Claim 1, characterized  
in that each receiver node has a unique individual  
key stored therein (28) and further comprising  
means for receiving said encrypted information,  
means for receiving the individualized encrypted  
25 common key for that node, means (26) for decrypting  
the received individualized encrypted common key  
using the stored individual key and means (24) for  
decrypting said received encrypted information  
using said decrypted common key.  
30

8. The system of Claim 7, characterized in that said encrypted common key decrypting means (26) comprises a block cipher algorithm.

5 9. The system of Claim 1, further characterized by means (14) for periodically changing said common key.

10 10. The system of Claim 1, characterized in that said information encrypting means (12) comprises a stream cipher algorithm.

15 11. The system of Claim 7, characterized in that information decrypting means (12) comprises a stream cipher algorithm.

20 12. A three key cryptographic system for secure distribution of information from a transmission node to a plurality of receiver nodes wherein a first key is known only to the transmission node and each receiver node has a unique address number and a pre-stored second key, the transmission node characterized by means (22) for generating the second key for a selected receiver node by encrypting the address number for the selected node with the first key, means (14) for generating a third key, means (12) for encrypting the information to be distributed with said third key, means (16) for encrypting said third key for use by said selected receiver node

25

30

with said generated second key, means for distributing said encrypted information to all of said receiver nodes, and means for distributing said encrypted third key to said selected receiver node.

5

13. The system of Claim 12, characterized in that each of said receiver nodes comprises means for receiving said encrypted information, means for receiving said encrypted third key for that receiver node, means (26) for decrypting said received encrypted third key with the stored second key, and means (24) for decrypting said received encrypted information with said decrypted third key.

10

15

14. The system of Claim 12, characterized in that said second key generating means (22) comprises a Data Encryption Standard algorithm.

20

15. The system of Claim 12, characterized in that said third key encrypting means (16) comprises a block cipher algorithm.

25

16. The system of Claim 13, characterized in that said third key decryption means (16) comprises a block cipher algorithm.

30

17. The system of Claim 12, characterized in that said third key generating means (14, 16) comprises means (14) for periodically changing said

third key.

18. The system of Claim 12, characterized  
in that said information encryption means (12)  
5 comprises a stream cipher algorithm.

19. The system of Claim 13, characterized  
in that said information decrypting means (12)  
comprises a stream cipher algorithm.

10

20. The system of Claim 12, characterized  
in that the stored second key is unique for each  
receiver node.

15

21. The system of Claim 12, characterized  
in that the stored second key for each receiver  
node is a function of the address number of that  
receiver node.

20

22. A three key cryptographic method  
for secure information distribution from a  
transmission node to a plurality of receiver  
nodes wherein a first key is known only to the  
transmission node and each receiver node has a  
25 unique address number and a pre-stored unique  
second key which is a function of its address  
number, the method characterized by the steps  
of generating the second key for a selected  
receiver unit by encrypting the address number  
30 for the selected unit with the first key,



generating a third key, encrypting the information to be distributed with the third key, encrypting the third key with the generated second key, distributing the encrypted  
5 information to all receiver nodes, distributing the encrypted third key to the selected receiver node; receiving the distributed encrypted information and the encrypted third key at the selected receiver node, and decrypting  
10 the received encrypted information using the received encrypted third key and the stored second key for the selected receiver node.

23. The method of Claim 22, characterized  
15 in that the step of decrypting the received encrypted information comprises the steps of decrypting the encrypted third key using the stored second key for the selected receiver node and decrypting the encrypted information using  
20. the decrypted third key.

24. The method of Claim 22, characterized  
in that the step of generating the second key  
comprises the step of encrypting the address number  
25 for the selected receiver node with the first key through the Data Encryption Standard algorithm.

25. The method of Claim 22, characterized in that the step of encrypting the third key comprises encrypting the third key with the second key through a block cipher algorithm.

5

26. The method of Claim 22, characterized in that the step of encrypting the information comprises the step of encrypting the information with said third key through a stream cipher algorithm.

10

27. The method of Claim 23, characterized in that the step of decrypting the third key comprises the step of decrypting the third key using the stored second key for the selected receiver node through a block cipher algorithm.

15

28. The method of Claim 22, characterized in that the step of decrypting the information comprises the step of decrypting the information with the decrypted third key through a stream cipher algorithm.

20

29. Apparatus for encrypting digitized signals in a direct broadcast satellite communications system including a transmission node and a plurality of receiver nodes, each receiver node having an address number and a pre-stored signature key which is a function of its address number, the apparatus characterized

25

30

by: means (14) for generating a common key;  
means (12) for encrypting the digitized signals  
with said common key; means (18, 20, 22) for  
generating the signature key for a selected unit;  
5 said signature key generating means comprising:  
a master key (20) and means (22) for encrypting  
the address number of said selected receiver node  
using the master key; means (16) for encrypting  
said common key for use by the selected receiver  
10 node using the generated signature key for that  
receiver node; means for distributing the encrypted  
digitized signals and the encrypted common key  
for said selected receiver node to said selected  
receiver node by means of a data stream comprising  
15 a first portion containing the encrypted digitized  
signals and receivable by all receiver nodes and  
a second portion comprising a plurality of sub-  
portions, each of said sub-portions comprising the  
encrypted common key for a different receiver node  
20 and receivable only by the receiver node having  
the address number upon which the encrypted common  
key therein is based.

30. A cryptographic method for secure  
25 distribution of information from a transmission  
node to first and second receiver nodes, each  
receiver node having a unique address number, the  
method characterized by the steps of:

30 generating a common key;  
encrypting the information to be

distributed using said common key;

generating a different individual key  
for each receiver node using a master key and  
encrypting the address number for each receiver  
5 node with the master key;

forming an individualized encrypted  
common key for each receiver node by encrypting  
the common key using the generated individual  
key for that receiver node; and

10 distributing the information to all  
receiver nodes and the individualized encrypted  
common key for each receiver node to that  
receiver node.

15 31. A method for encrypting digitized  
signals in a direct broadcast satellite  
communications system including a transmission  
node and a plurality of receiver nodes, each  
receiver node having an address number and a  
20 pre-stored signature key which is a function of  
its address number, the method characterized by  
the steps of: generating a common key;  
encrypting the digitized signals with the common  
key; generating the signature key for a selected  
25 unit using a master key and encrypting the  
address number of the selected receiver node  
using the master key; encrypting said common key  
for use by the selected receiver node using the  
generated signature key for that receiver node;  
30 distributing the encrypted digitized signals and

the encrypted common key for the selected receiver node to the selected receiver node by generating a data stream comprising a first portion containing the encrypted digitized  
5 signals, receivable by all receiver nodes and a second portion comprising a plurality of sub-portions, each of said sub-portions comprising the encrypted common key for a different receiver node and receivable only by the receiver node  
10 having the address number upon which the encrypted common key therein is based.


15

20

25


30

FIG. 1

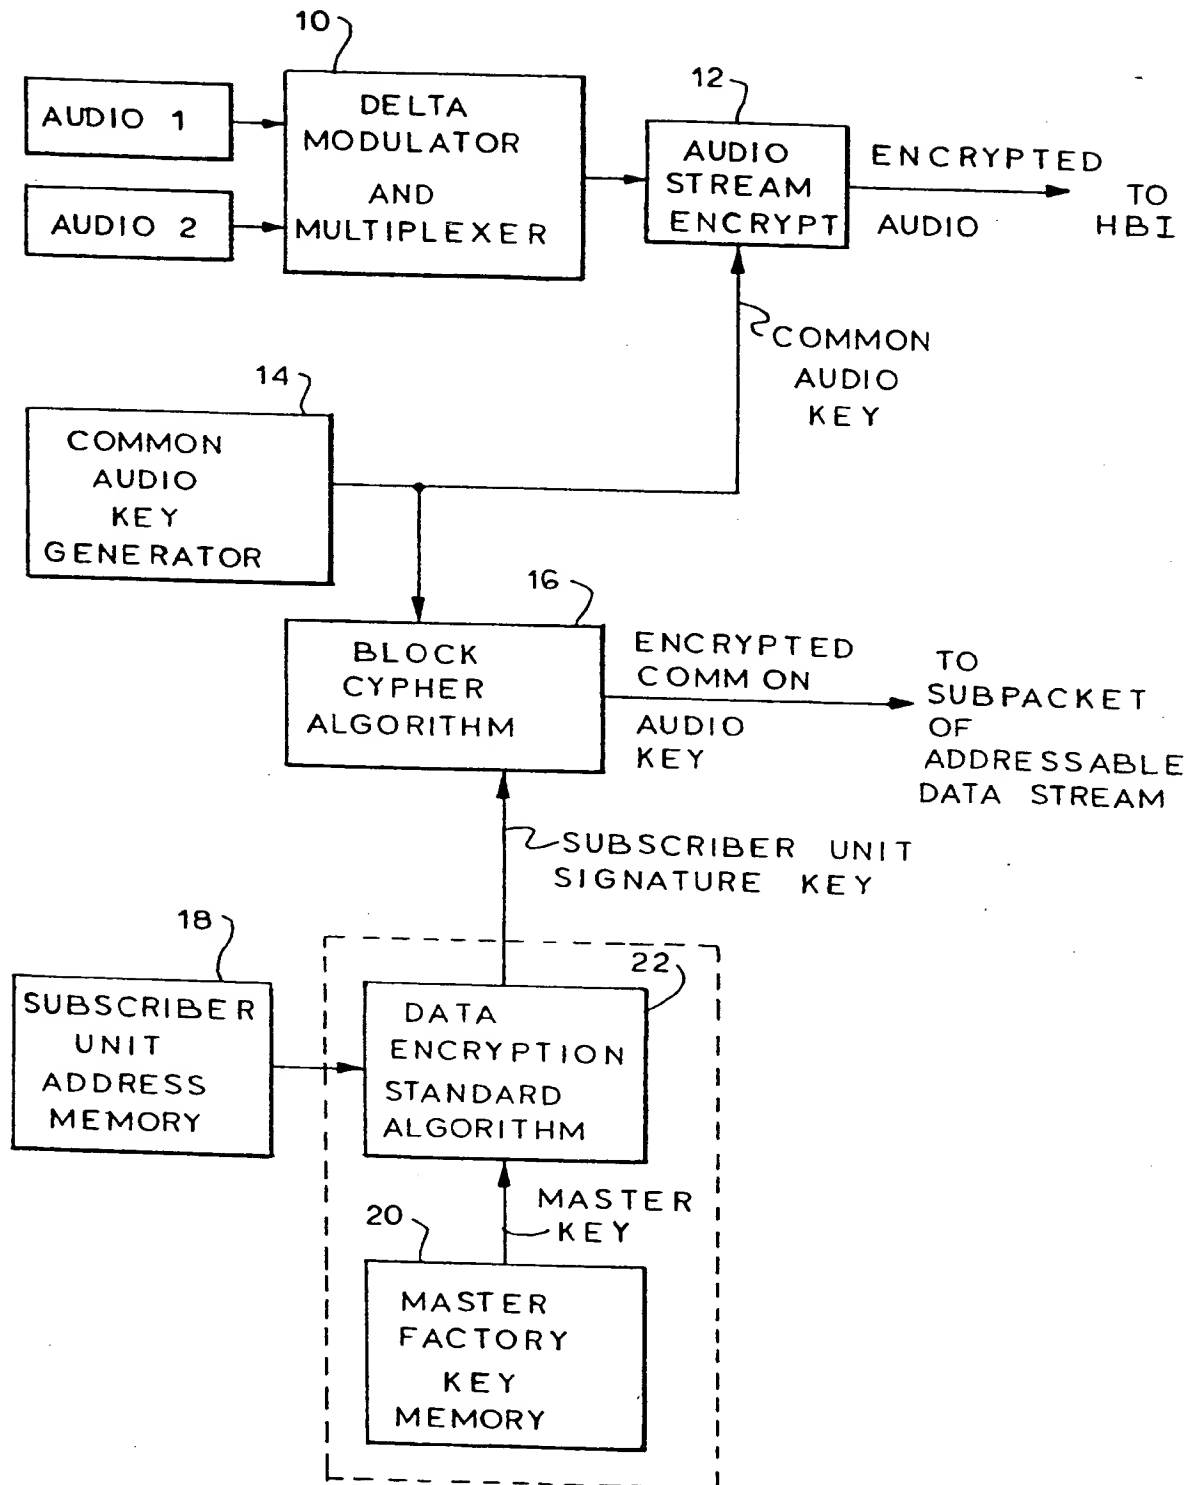


2/4

FIG. 2

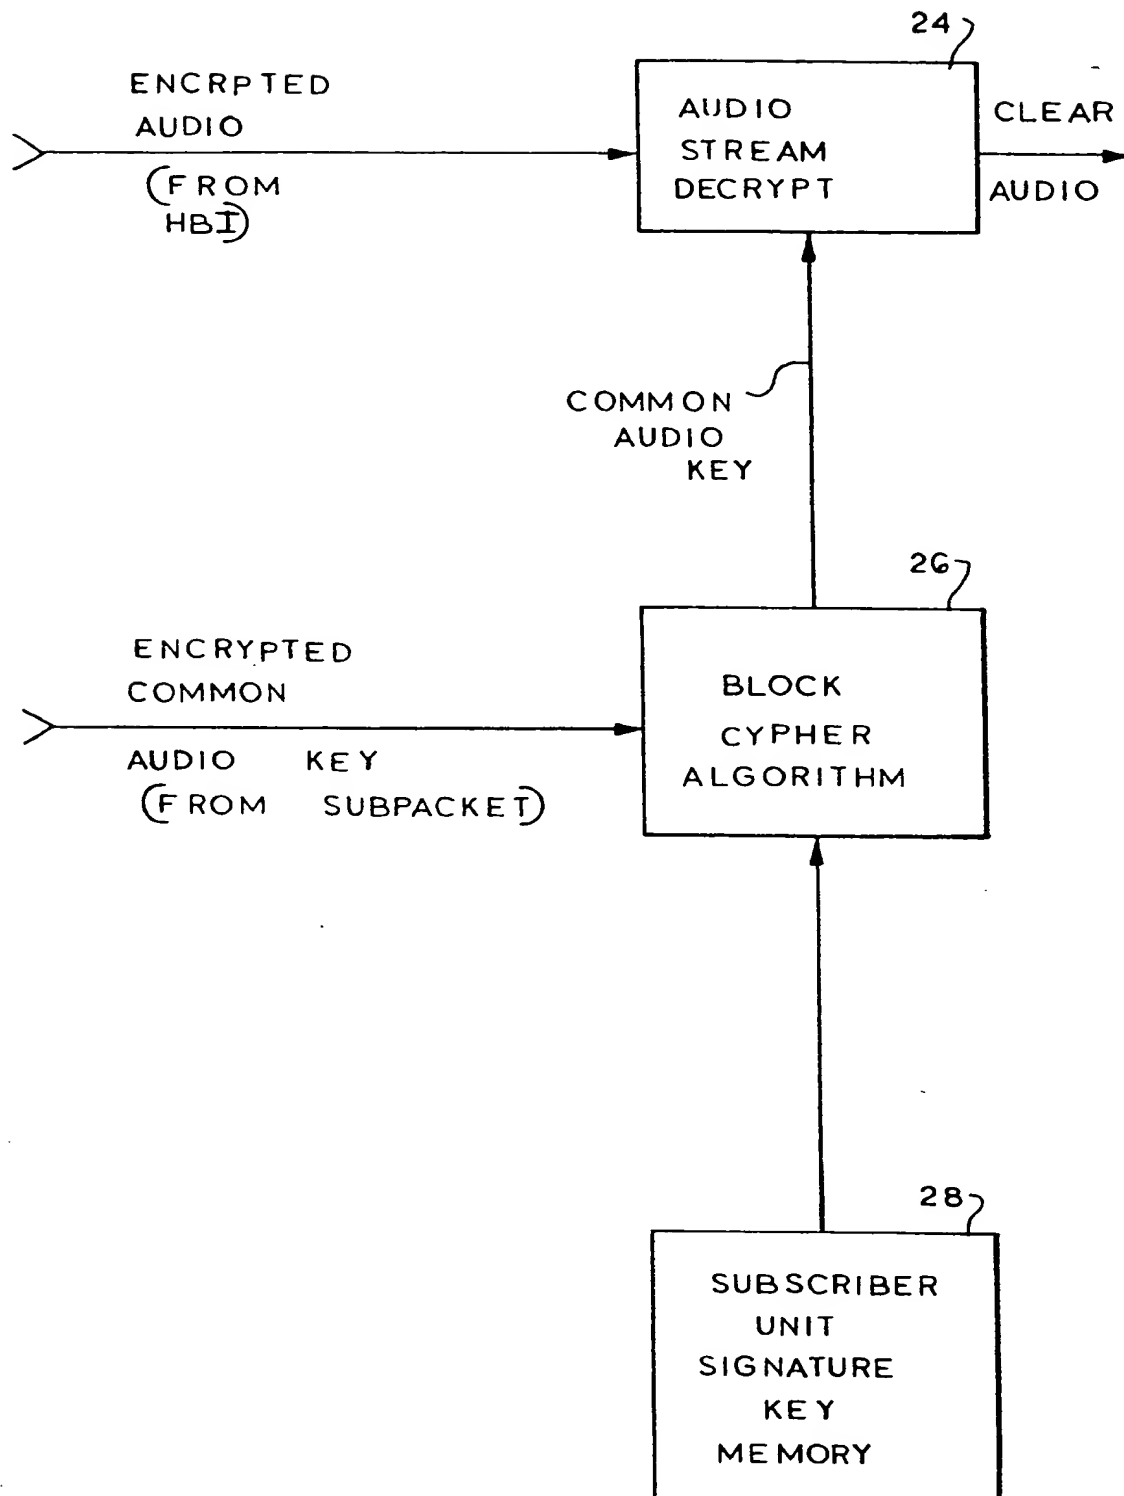

3/4


FIG. 3

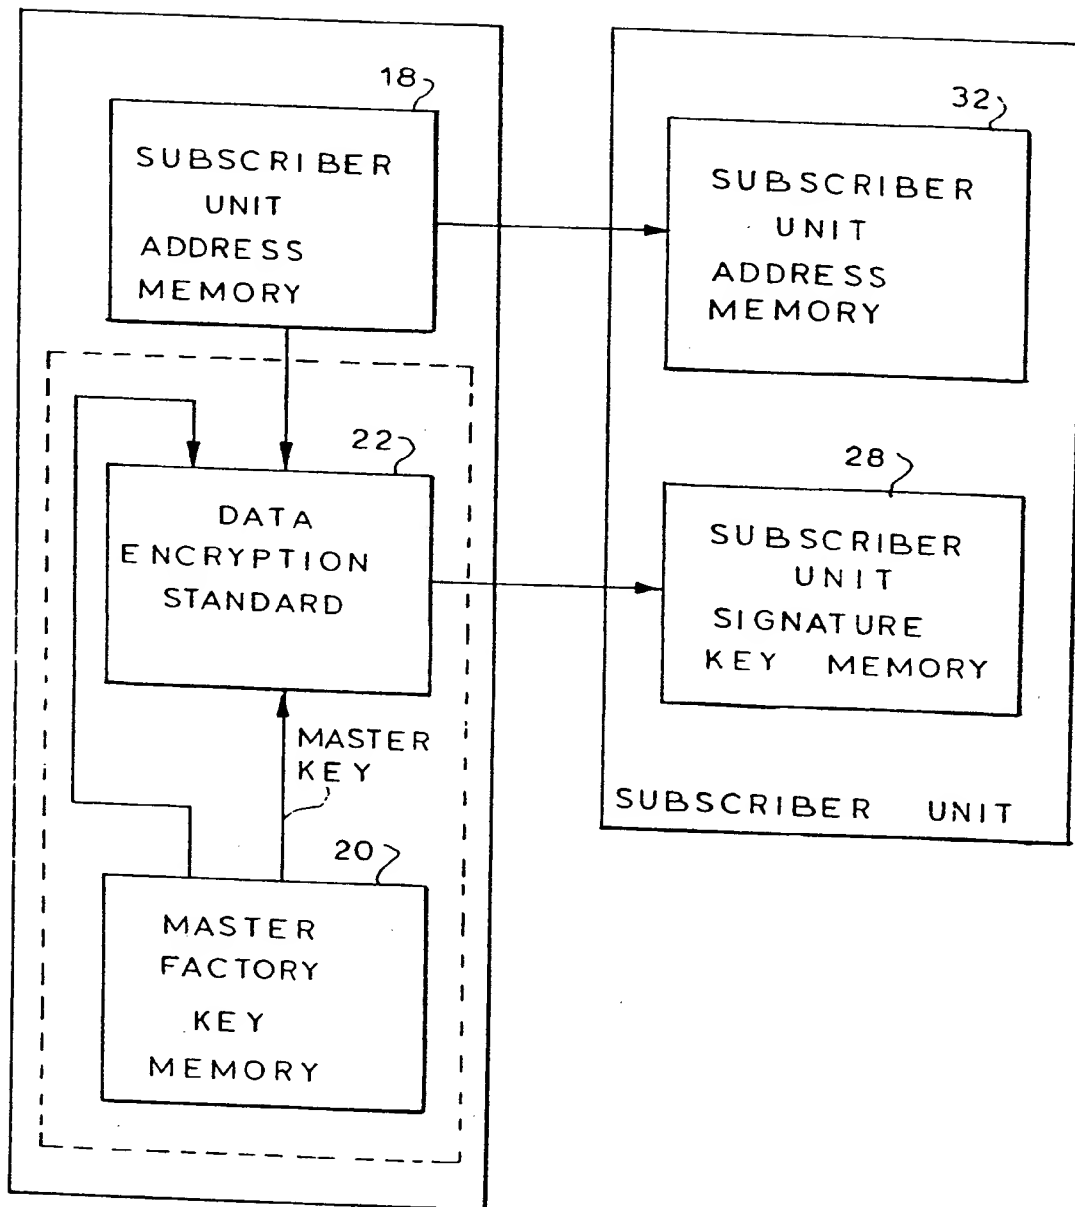



COMPOSITE  
TV  
SIGNAL

FIG. 4

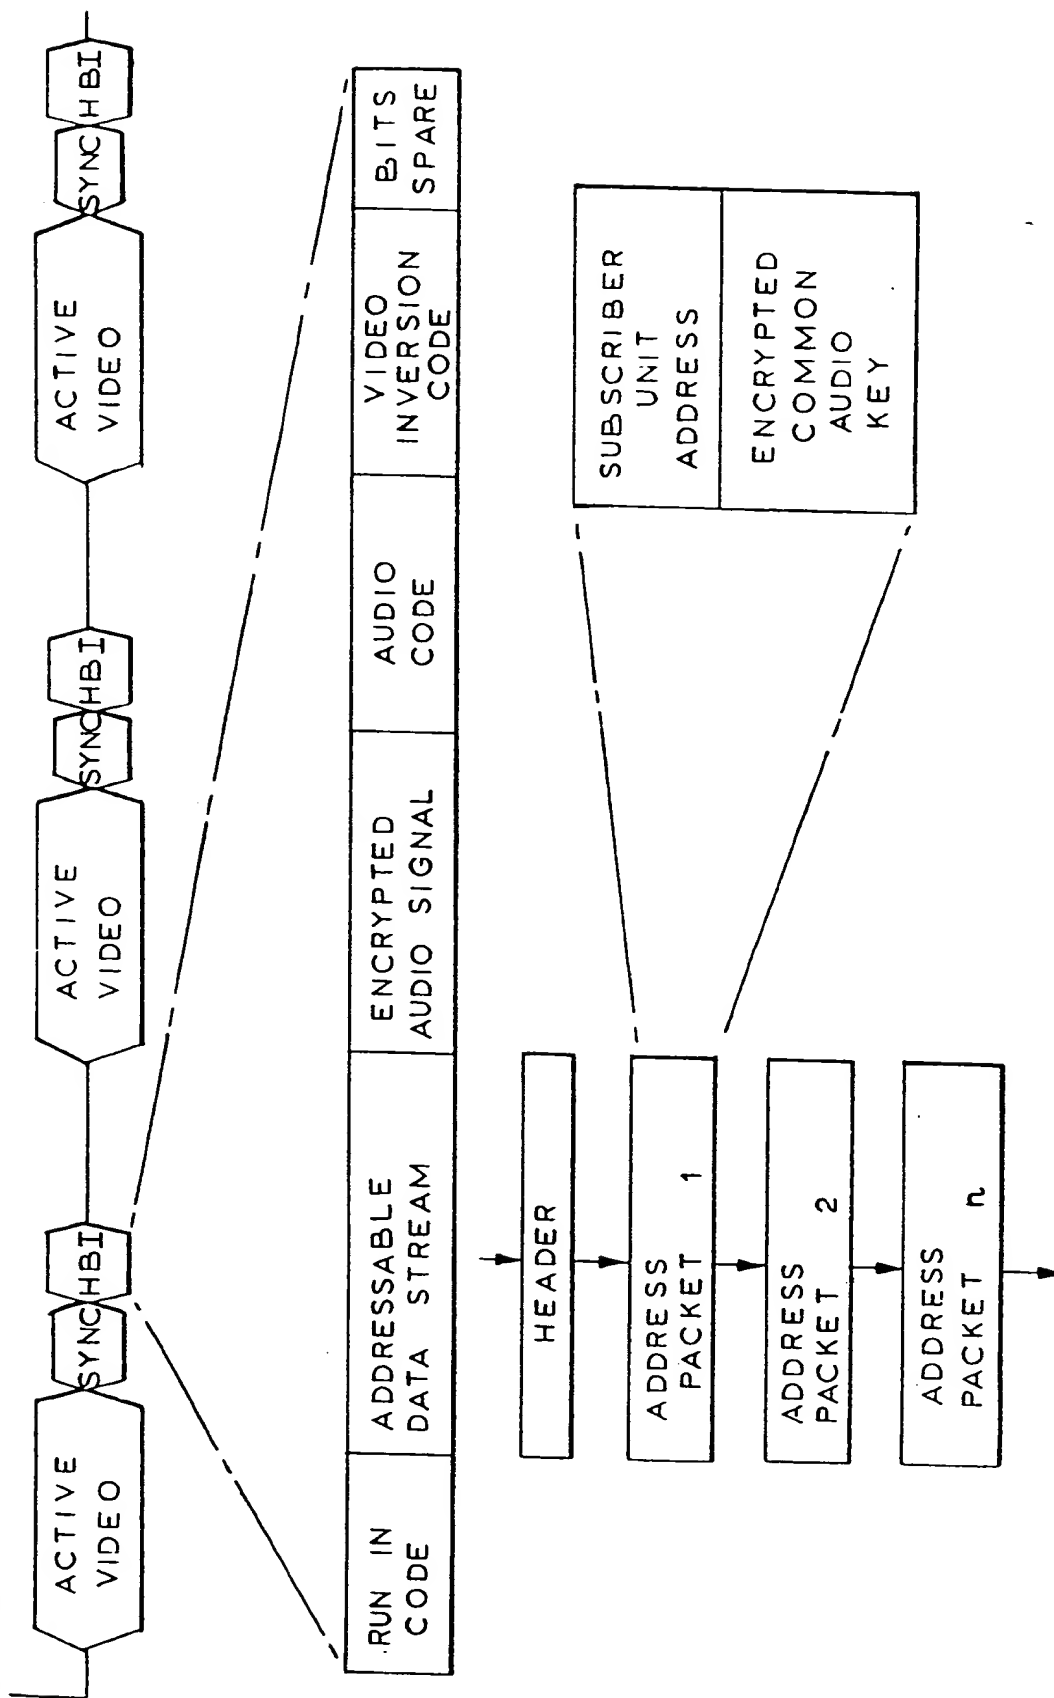

0179612

4/4

**THIS PAGE BLANK (USPTO)**